

TL-2010-L TL-2020-L

Ultra Low Power Dissipation Design

High Optical Power Widely Tunable Laser Module

Features

- 1550 nm CW DFB laser module for DWDM systems
- <3.9W maximum power dissipation at 75C case
- High optical power (up to 20 mW) without an SOA
- Tunable over L-Band: 37 nm tuning range
- Highly reliable DFB performance
- Integrated wavelength locker
- Excellent Relative Intensity Noise (RIN): -140 dB/Hz typical
- Narrow line-width: 3 MHz typical
- High Side Mode Suppression Ratio (SMSR): 50 dB typical
- Built-in Digital Signal Processor (DSP) and control electronics
- Compatible with OIF tunable laser MSA

The TL-2010-L and TL-2020-L are a new generation of compact 10 and 20 mW widely tunable transmission lasers built with Santur's own proprietary packaging technology. This package provides for a highly efficient, small form factor module with the lowest power dissipation in the industry.

*Ideally suited for use in a wide variety of DWDM systems, the Santur **TL-2010/TL-2020-L** provides the best combination of performance features available, offering a unique combination of high optical power, wide tunability, and low power dissipation. The **TL-2010/TL-2020-L** module includes an integrated wavelength locker, industry standard electrical interface, and a uniquely stable and reliable DFB laser design.*

High-powered performance, reliability, ease of manufacture, and economies of scale derived from the exclusive, proven design differentiate this product from others in the industry.



Specifications:

Symbol	Parameter	Conditions	TL-2010-L			TL-2020-L			Unit
			Min	Typ	Max	Min	Typ	Max	
Output Power									
P_{peak}	Radiant output power from pigtail	-	-	10	-	-	20	-	mW
	Power Variation	Over wavelength	-0.3		0.3	-0.3		0.3	dB
		Over temperature	-0.3		0.3	-0.3		0.3	dB
Optical Characteristics									
λ_R	Wavelength tuning range	-		38	-		38	-	nm
	Channel spacing	ITU Grid	25	50		25	50		GHz
	Wavelength limits		1570.42	-	1607.04	1570.42	-	1607.04	nm
T_{switch}	Wavelength switching speed	-	-	2	15	-	2	15	seconds
f_w	Spectral linewidth	FWHM	-	3	10	-	3	10	MHz
f_d	Frequency inaccuracy over life	Steady-state	-1.5		1.5	-1.5		1.5	GHz
SMSR	Side mode suppression ratio	-	40	50	-	40	50	-	dB
ISO	Optical isolation	-	30	-	-	30	-	-	dB
RIN	Relative intensity noise	20 MHz to 10 GHz	-	-137	-130	-	-143	-135	dB/Hz
PER	Polarization extinction ratio	E-field along slow axis	20	-	-	20	-	-	dB
Electrical Power Supply Specifications									
V_{cc}	Supply voltage with respect to GND	-	3.15	3.3	3.45	3.15	3.3	3.45	V
I_{cc}	Peak supply current while tuning	-	-	-	3.0	-	-	3.0	A
P_d	Total power dissipation, steady-state	$T_{case} = 25^{\circ}C$	-	1.0	1.5	-	1.0	1.5	W
		$T_{case} = 75^{\circ}C$	-	1.7	3.6	-	2.0	3.9	W
Fiber Pigtail									
	Fiber type	Fujikura Panda PM	-	-	-	-	-	-	
L	Length of pigtail	-	1.0	-	-	1.0	-	-	m
R	Bending radius	-	35	-	-	35	-	-	mm
F	Tensile strength (fiber to case)	-	-	-	5	-	-	5	N
	Optical connector	FC/UPC R-Type (narrow key)	-	-	-	-	-	-	
	Key alignment	Slow axis	-	-	-	-	-	-	
Absolute Maximum Ratings									
T_{op}	Case operating temperature*	-	-5	-	75	-5	-	75	$^{\circ}C$
T_{stg}	Storage temperature range*	-	-40	-	85	-40	-	85	$^{\circ}C$
	Signal pin voltage				5.5			5.5	V
	Power pin voltage				3.6			3.6	V


*non-condensing

Custom OEM specifications possible. Contact Santur for your needs.

Part Number Format				
	x	Power	y	Channel Spacing
TL-20x0-L-10y(-A)	1	10 mW	1	50 GHz
	2	20 mW	2	25 GHz

-A ASCII command set instead of OIF MSA binary interface

Mechanical Outline:

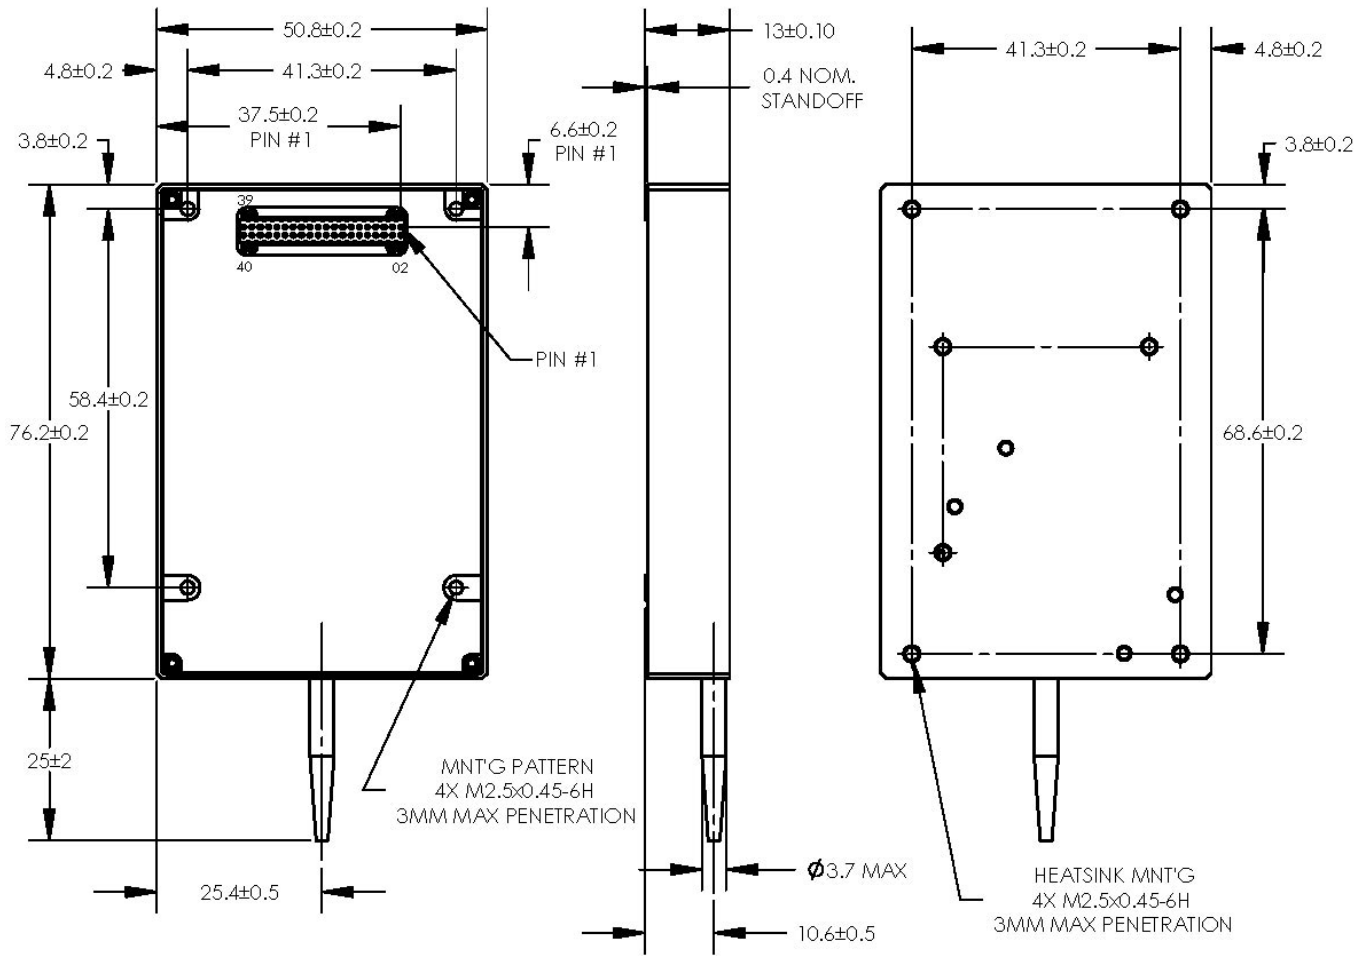

Schematic measurements are in millimeters.
 Customer to use 40-pin SAMTEC CLP-120-02-*-D or equivalent soldered flush to board.

International Sales Contacts

Benelux and Nordics

Laser 2000 Benelux S.A.
Rue du Moulin 18
5650 Fraire, Belgium
Tel: +32 (0) 71 610 640
Fax: +32 (0) 71 610 649
sales@laser2000.be

China

LuY Broadband Tech. Co.
Room 824 Hua Tong Plaza
No. 19A West Rd. of Che Gong Zhuang
Haidan Dist, Beijing 100044
Tel: +86 (8610) 68700016
Fax: +86 (8610) 6845151
william.lu@luy-tech.com

France

Laser 2000 S.A.
Park d'Affaires
3, Rue de la Plaine
78860 Saint-Nom la Bretèche
Tel: +33 (0) 1 30 80 00 60
Fax: +33 (0) 1 30 80 00 40
contact@laser2000.fr

Germany

Laser 2000 GmbH
Argelsrieder Feld 14
82234 Wessling
Tel: +49 (0) 8153 405-0
Fax: +49 (0) 8153 405-33
contact@laser2000.de

Israel

Bitel Technologies Ltd.
P.O. Box 94, Yehud
Tel: +972-3-632 2655
Fax: +972-3-632 2279
info@bitel.co.il

Japan

Marubun Corporation
Components Dept.
Marubun Daiya Bldg., 8-1
Nihonbashi Odenmachi
Chuo-ku, Tokyo 103-8577
Tel: (03) 3639-9881
Fax: (03) 5644-7627
motizuki@marubun.co.jp

United Kingdom

Laser 2000 (UK) Ltd
Britannia House
Denford Road
Ringstead, Northants NN14 4DF
Tel: +44 (0) 1933 461 666
Fax: +44 (0) 1933 461 699
sales@laser2000.co.uk



This is an OEM product that does not comply with the requirements of 21 CFR Subchapter 1 as applicable. It is the responsibility of the user to report the end product and to certify that it meets all applicable requirements.



DANGER: Fiber output is >20 mWatt at 1585 nm.
Do not look into fiber end.

Santur Corporation
40931 Encyclopedia Circle
Fremont, CA 94538
Phone: (510) 656-7130
Fax (510) 656-7563
www.santurcorp.com
1-866-TUNABLE

© 2006 Santur Corporation. The Santur Corporation logo is a trademark of Santur Corporation. The TL-2020-L product is registered with the U.S. Office of Patents and Trademarks. All rights reserved. Santur Corporation reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use of application.